


PAR30 Dimmable LED Lamp

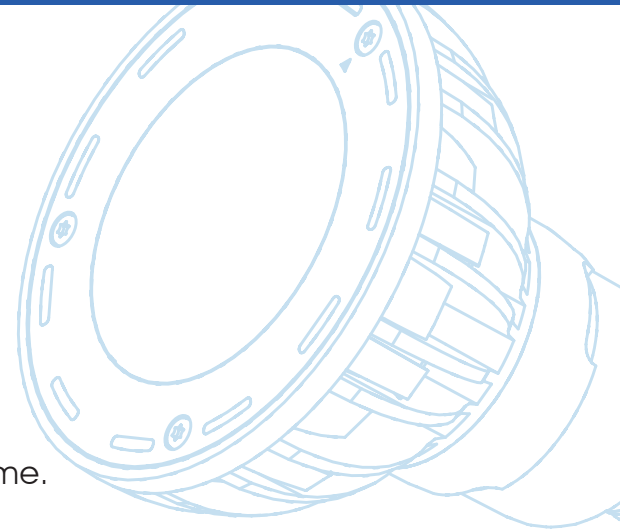

Product Description

ACCU SSL™ PAR30 Dimmable is an integrated high efficient LED lamp with a built-in advanced driver that delivers high output, high power factor correction (> 0.95), and TRIAC dimming compatibility (20%~100%) at the same time.

Based on the latest XLamp LED technology from CREE, Inc., this lamp is capable of providing luminance equivalent to a 70Watt traditional halogen lamp at approximately 17% of the power consumption. This lamp is compatible with most popular dimmers, including offers from Lutron and Leviton, which ensures a plug and play installation for every household.

Simply replace your existing halogen PAR30 with ACCU SSL™ PAR30 and you can start to enjoy the benefits of LED technology, such as lower electricity bill, reduced CO2 emission, less maintenance, and no UV or IR – hassle free.

Benefits & Features

1. Replace Halogen Lamp Directly up to 70Watt
2. Compatible with most TRIAC dimmers
3. CREE XLamp LED technology
4. Low Lumen Depreciation, L70 > 25,000hrs.
5. Low Power Consumption
6. 40,000hrs Rated Lifetime
7. High Color Rendering Index
8. 3 Years Warranty
9. CE, UL, and FCC listed
10. RoHS Compliant




Please consult your dealer for the recommendation of compatible dimmers.

Energy Saving & CO2 Reduction

Item	Halogen	ACCU SSL PAR	Unit
Power Consumption	70	12	Watt
Energy Saving	---	83%	%
CO2 Emission / Year	392	67	Kg

Specifications


Capex-Base	E26 / E27
CCT	27000 / 3000K / 4000K / 5000K
CRI	>82
Beam Angles	25° / 45°
Lumen Flux	2700K 25°: 450 2700K 45°: 470 3000K 25°: 450 3000K 45°: 470 4000K 25°: 490 4000K 45°: 510 5000K 25°: 530 5000K 45°: 540
	12W
Operation Voltage	120V/240V
Power Factor	>0.9
Weight	370 g
Dimension	

Order Code


CCT	Beam Angles	Voltage	Order Code
2700K	25°	120V	ASP32721
		240V	ASP32722
	45°	120V	ASP32741
		240V	ASP32742
3000K	25°	120V	ASP33021
		240V	ASP33022
	45°	120V	ASP33041
		240V	ASP33042
4000K	25°	120V	ASP34021
		240V	ASP34022
	45°	120V	ASP34041
		240V	ASP34042
5000K	25°	120V	ASP35021
		240V	ASP35022
	45°	120V	ASP35041
		240V	ASP35042

Projection Diagrams

Beam Angles 25°

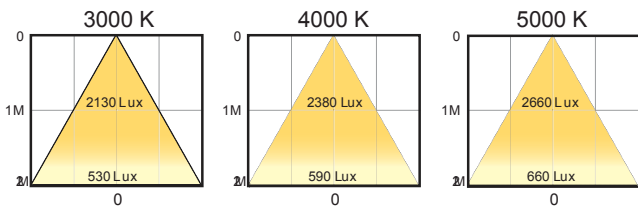


Beam Angles 45°

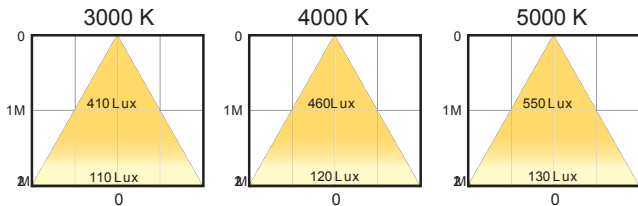


(Unit:Lux)


Packing Details



1pcs/Box



6pcs/Carton

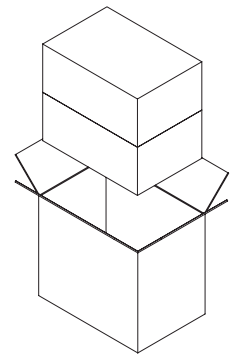

12pcs/Master Carton

Dimensions:

124(L)x124(W)x156(D)

376(L)x255(W)x166(D)

393(L)x268.5(W)x348(D)

(Unit: mm)

Note:

LED lighting is a dynamic and constantly evolving technology. ACCU SSL™ Lighting reserves the right to revise specifications without prior notice.