




Spectral distribution

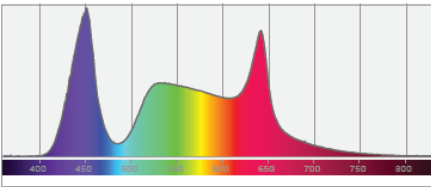


Color coordinates



Zoom color point



CRI R values

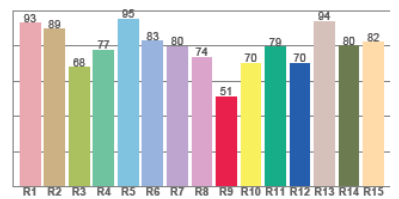

Photometric Test Report

*Due to additional product enhancements, an updated version of this report may be available online. Please check www.adj.com for the latest revision/update of this report.

Vizi Wash Z19



Light Efficiency:



Light Quality:



Color Temperature:



Output: 5436 lm

Peak: 17350 cd


Power: 263.9 W

PF: 1.0



Beam Angle

32.9°

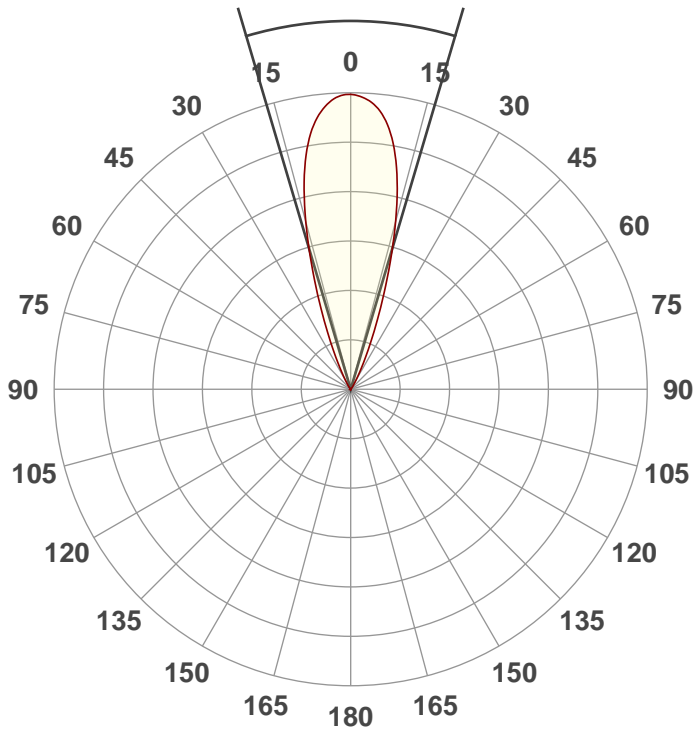

Test: Zoom Out Full On


Date: 8/29/2019

Note:




CIE 1931
x: 0.240
y: 0.185



Spectra Dominant Wavelength: 450nm

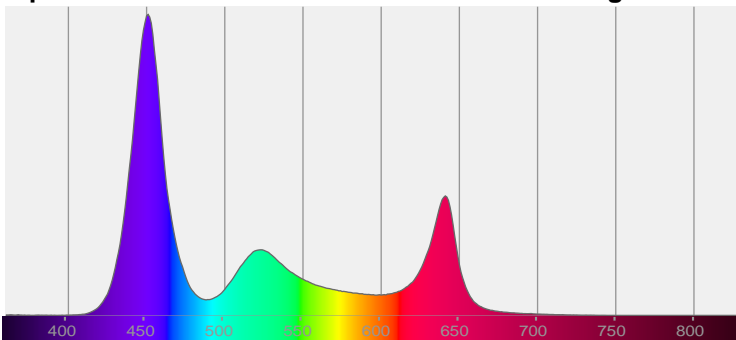


Power

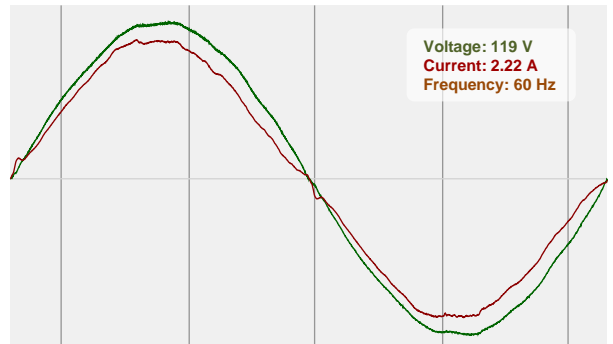

Color Details

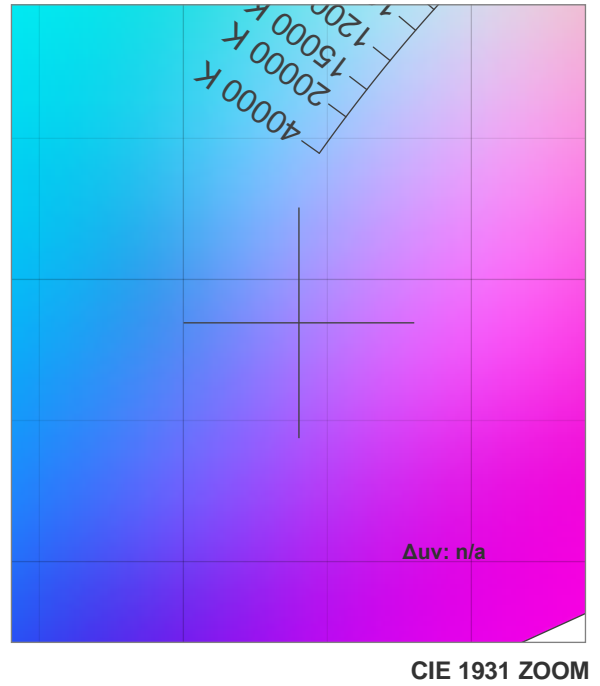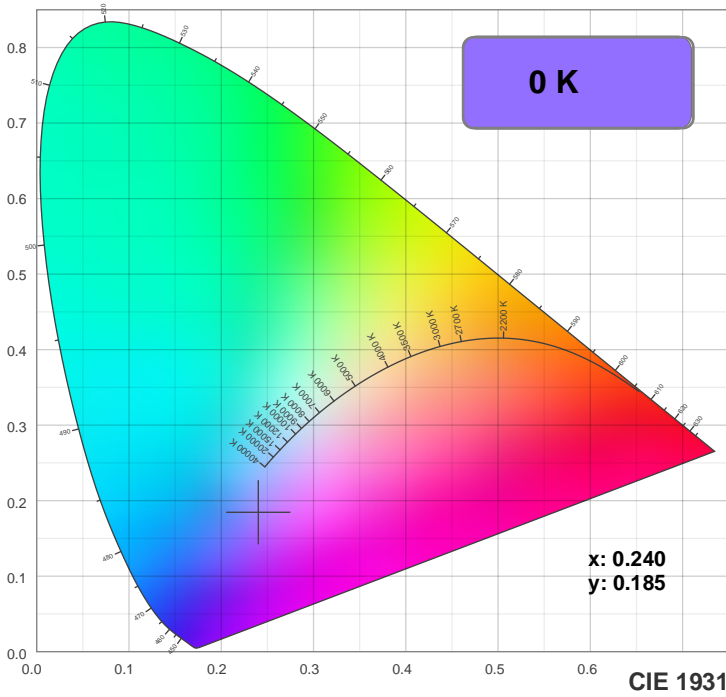

TM30: 0.0

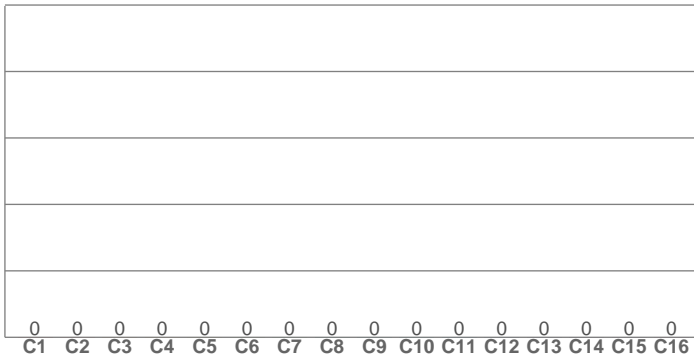

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CRI: 0.0 (R1-R8)

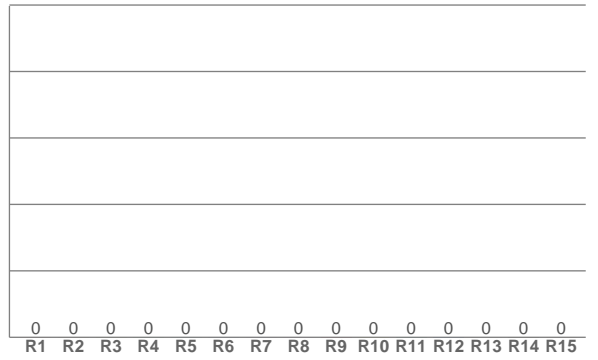


CQS: 0.0

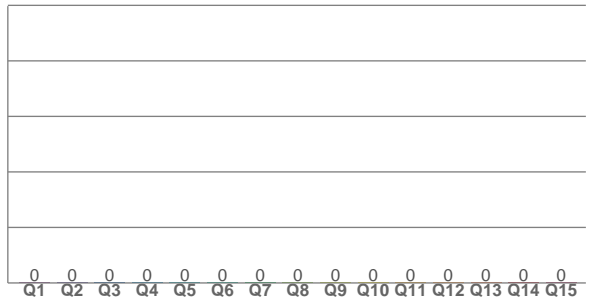

Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.240	0.185	0.203	0.234	n/a

Beam Details

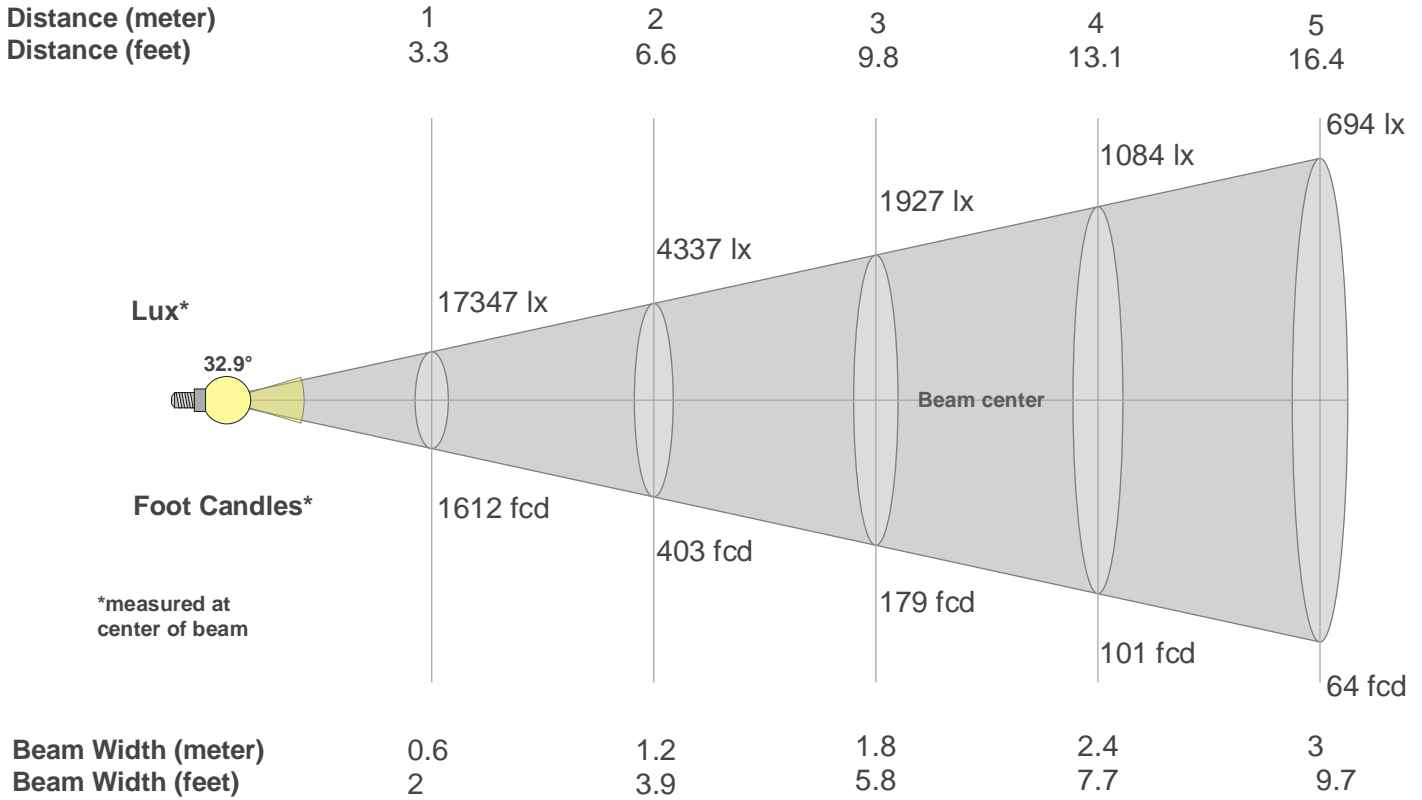

Beam Intensities from 1-20m

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	17347	4337	1927	1084	694	482	354	271	214	173	143	120	103	89	77	68	60	54	48	43
fcd	1611.6	402.9	179.1	100.7	64.5	44.8	32.9	25.2	19.9	16.1	13.3	11.2	9.5	8.2	7.2	6.3	5.6	5	4.5	4

Intensities in 0° C-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
17.3K	17.3K	17.0K	16.4K	15.7K	14.5K	13.0K	11.2K	9.2K	7.1K	5.2K	3.7K	2.5K	1.6K	1.0K	0.7K	0.4K	0.3K	0.2K	0.1K
100%	100%	98%	95%	90%	84%	75%	65%	53%	41%	30%	21%	14%	9%	6%	4%	2%	2%	1%	1%

Intensities in 90° C-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
17.3K	17.3K	17.0K	16.4K	15.7K	14.5K	13.0K	11.2K	9.2K	7.1K	5.2K	3.7K	2.5K	1.6K	1.0K	0.7K	0.4K	0.3K	0.2K	0.1K
100%	100%	98%	95%	90%	84%	75%	65%	53%	41%	30%	21%	14%	9%	6%	4%	2%	2%	1%	1%

Intensities in 180° C-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
17.3K	17.2K	17.0K	16.5K	15.7K	14.5K	13.0K	11.2K	9.2K	7.1K	5.3K	3.7K	2.5K	1.7K	1.1K	0.7K	0.4K	0.3K	0.2K	0.1K
100%	99%	98%	95%	90%	84%	75%	65%	53%	41%	30%	21%	15%	10%	6%	4%	2%	2%	1%	1%

Intensities in 270° C-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
17.3K	17.2K	17.0K	16.5K	15.7K	14.5K	13.0K	11.2K	9.2K	7.1K	5.3K	3.7K	2.5K	1.7K	1.1K	0.7K	0.4K	0.3K	0.2K	0.1K
100%	99%	98%	95%	90%	84%	75%	65%	53%	41%	30%	21%	15%	10%	6%	4%	2%	2%	1%	1%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
32.9°	51.5°	63.7°	99.9%	99.9%