

CODE	Length	REVISION			
AC5PM3PFM	0.203mt. (0.67 ft.)	REV	DESCRIPTION	DATE	SIGNATURE
			DMX CABLE	2019.6.10	


PREFAB 5 PIN MALE TO 3 PIN FEMALE TURNAROUND:




CABLE CONSTRUCTION:



DMX601 is a professional AES/EBU digital cable
2*0.336mm² with a very thick flexible PVC covered
overall jacket - OFC (Oxygen Free Copper)
Conductor drains mm: OFC tinned 19x0.15
Conductor insulation: LPE red+blue, 1.8mm
Nominal Impedance: 110ohm
Conductor resistance: <80 ohm/Km
1st Shield:2 cores twisted to a pair tinned copper
braided shield 100 % coverage
2nd shield:-
Shield resistance: 30ohm/km
Capacity inner conductor:47 pf/m
Working Temperature min/Max: -20°C/+70°C

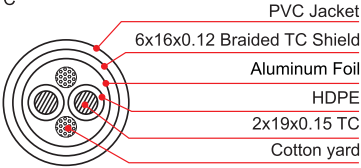

WIRING METHOD:

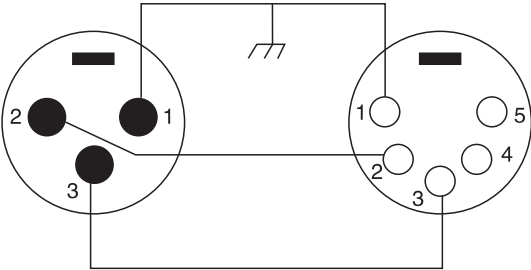

PRINT ON CABLE: