


FT-20 FOG MACHINE

- Input voltage	DC 12V (Battery) AC 100-240V, 50-60Hz (Battery charger)
- Rated power	600W
- Warm-up time	1 second (approx.)
- Fluid consumption	16 ml/min
- Fluid tank capacity	0.4l (0.11gal)
- Compatible fluid	Antari FLM Fog Fluid
- Operating time	11 mins at max. output with battery
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Control	DMX512, Manual, Wireless (Optional) Cable Remote (Optional)
- DMX channels	1 channel
- Connection	XLR 3-pin (DMX)
- Optional accessories	WTR-20 Wireless Remote Z-3 Cable Remote FT-20S Power Base
- Dimension	L293 W108 H238 mm (L11.54 W4.25 H9.37 inch)
- Weight	8.5 kg (18.74 lbs)

FT-50 FOG MACHINE

- Input voltage	US Model : AC 100-120V, 50 / 60Hz 15A EU Model : AC 220-240V, 50 / 60Hz 8A
- Rated power	1450W
- Warm-up time	7.5 minutes (approx.)
- Fluid consumption	110 ml/min
- Compatible fluid	Antari FLP-700 Aerosol
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	20,000 ft³/min (566 m³/min)
- Control	Manual
- Connection	IEC (Power)
- Dimension	L346 W152 H251 mm (L13.62 W5.98 H9.88 inch)
- Weight	9.8 kg (21.61 lbs)

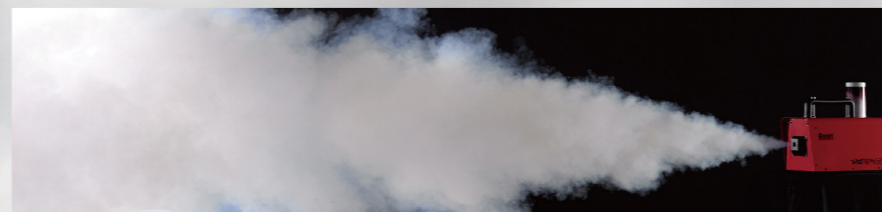

FT-100 FOG MACHINE

- Input voltage	US Model : AC 100-120V, 50 / 60Hz 12.5A EU Model : AC 220-240V, 50 / 60Hz 6.3A
- Rated power	1450W
- Warm-up time	8.5 minutes (approx.)
- Fluid consumption	100 ml/min
- Fluid tank capacity	6l (1.59gal)
- Compatible fluid	Antari FLP Fire Training Fog Fluid
- Operating time	1 hrs at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	20,000 ft³/min (566 m³/min)
- Control	DMX512, Timer, Manual, Wireless
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power) XLR 5-pin (DMX)
- Optional accessories	Z-3 cable remote
- Dimension	L580 W278 H264 mm (L22.83 W10.94 H10.39 inch)
- Weight	14.6 kg (32.19 lbs)

FT-200 FOG MACHINE

- Input voltage	US Model : AC 100-120V, 50 / 60Hz 13.5A EU Model : AC 220-240V, 50 / 60Hz 7A
- Rated power	1600W
- Warm-up time	7.5 minutes (approx.)
- Fluid consumption	270 ml/min
- Fluid tank capacity	2.4l (0.63gal)
- Compatible fluid	Antari FLP Fire Training Fog Fluid
- Operating time	8 mins at max. output
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Output	8 meters height
- Control	DMX512, Timer, Manual, Wireless
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power) XLR 5-pin (DMX)
- Optional accessories	Z-3 cable remote
- Dimension	L301 W194 H414 mm (L11.85 W7.64 H16.30 inch)
- Weight	16 kg (35.27 lbs)

Antari
FOG MACHINE



FT FIRE TRAINING

FLM FOG FLUID



FLM is the fog fluid specifically mixed for fog machines with micro heater coils (heat element). It is recommended for M1 and FT-20 to enable fog machines to have the maximum lifespan and generate the smoothest fog.

FLP-700 aerosol



Only use Antari FLP-700 aerosol for the FT-50 Fire Training Fog Machine.

The machine is tested and calibrated with this aerosol to get the best output performance. Warranty will be void if any other type of aerosol is used, improper use of aerosol may lead to machine failure and malfunction.

FLP FIRE TRAINING FOG FLUID



Antari FLP fog fluid is specifically made for Fire Training purpose. Product Features :

- The ingredients of this water-based fog fluid are refined from palm trees.
- It is 100% natural, completely non-toxic and safe.
- It can produce high density fog and is ideal for using in poor ventilation environments (such as fire drill or rescue training...etc.)



ANTARI F3N AF-3

- Input voltage	US Model : AC 100-120V, 50/60Hz 1A EU Model : AC 220-240V, 50/60Hz 0.5A
- Rated power	120W
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Air flow	900 m³/hr, 530 CFM (50Hz) 1020 m³/hr, 600 CFM (60Hz)
- Fan speed	750 - 2550 rpm (50Hz) 750 - 2800 rpm (60Hz)
- Control	DMX, Manual Wireless (Optional)
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power) XLR 3-pin (DMX)
- Optional accessories	WTR-10 Wireless Remote Z-3 Cable Remote
- Dimension	L124 W316 H368 mm (L4.88 W12.44 H14.49 inch)
- Weight	6 kg (13.23 lbs)

ANTARI F3N AF-4

- Input voltage	US Model : AC 100-120V, 50/60Hz 0.96A EU Model : AC 220-240V, 50/60Hz 0.48A
- Rated power	115W
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Air flow	1187 CFM (AC 110V/60Hz) 1035 CFM (AC 220V/60Hz)
- Fan speed	1242 - 1480 rpm (AC 110V/60Hz) 1175 - 1289 rpm (AC 220V/60Hz)
- Control	DMX, Timer, Manual Wireless (Optional)
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power) XLR 5-pin (DMX)
- Optional accessories	WTR-20 Wireless Remote Z-3 Cable Remote
- Dimension	L353 W377 H517 mm (L13.90 W14.84 H20.35 inch)
- Weight	9 kg (19.84 lbs)

ANTARI F3N AF-5

- Input voltage	US Model : AC 100-120V, 50/60Hz 13.4A EU Model : AC 220-240V, 50/60Hz 6.7A
- Rated power	1600W
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)
- Horsepower	1HP
- Housing Material	Flame retardant plastic (PE 9731)
- Control	DMX, Manual Wireless (Optional)
- DMX channels	1 channel
- Connection	XLR 5-pin (DMX)
- Optional accessories	W-1 Wireless Remote AF-5-HB Hanging Bracket
- Dimension	L558 W465 H578 mm (L21.97 W18.31 H22.76 inch)
- Weight	17.5 kg (38.58 lbs)

Antari
FOG MACHINE

AF SERIES

ANTARI F3N



Products are manufactured by Antari Lighting & Effects Ltd. www.antari.com

For information requests please contact us at: sales@antari.com

www.antari.com

D08FTA00