



PRO EVENT IBEAM

User Manual

©2023 ADJ Products, LLC all rights reserved. Information, specifications, diagrams, images, and instructions herein are subject to change without notice. ADJ Products, LLC logo and identifying product names and numbers herein are trademarks of ADJ Products, LLC. Copyright protection claimed includes all forms and matters of copyrightable materials and information now allowed by statutory or judicial law or hereinafter granted. Product names used in this document may be trademarks or registered trademarks of their respective companies and are hereby acknowledged. All non-ADJ Products, LLC brands and product names are trademarks or registered trademarks of their respective companies.

ADJ Products, **LLC** and all affiliated companies hereby disclaim any and all liabilities for property, equipment, building, and electrical damages, injuries to any persons, and direct or indirect economic loss associated with the use or reliance of any information contained within this document, and/or as a result of the improper, unsafe, insufficient and negligent assembly, installation, rigging, and operation of this product.

ADJ PRODUCTS LLC World Headquarters

6122 S. Eastern Ave. I Los Angeles, CA 90040 USA

Tel: 800-322-6337 | Fax: 323-582-2941 | www.adj.com | support@adj.com

ADJ Supply Europe B.V.

Junostraat 2 | 6468 EW Kerkrade | Netherlands

Tel: +31 45 546 85 00 | Fax: +31 45 546 85 99 | www.americandi.eu | service@americandi.eu

Europe Energy Saving Notice

Energy Saving Matters (EuP 2009/125/EC)

Saving electric energy is a key to help protecting the environment. Please turn off all electrical products when they are not in use. To avoid power consumption in idle mode, disconnect all electrical equipment from power when not in use. Thank you!

DOCUMENT VERSION



Due to additional product features and/or enhancements, an updated version of this document may be available online.

Please check <u>www.adj.com</u> for the latest revision/update of this manual before beginning installation and/or programming.

Date	Document Version	Software Version	DMX Channels	Notes	
04/27/2018	2	N/A	Not Applicable	Updated version	
01/23/2023	2.1	N/A	Not Applicable	Added Specifications	

CONTENTS

Gen Info	4
Limited Warranty (USA Only)	5
Warranty Registration	6
Safety Guidelines	7
Overview	8
Installation	9
Specifications	11
Dimensional Drawings	12
Optional Accessories	13

GENERAL INFORMATION

INTRODUCTION

Please read and understand the instructions in this manual carefully and thoroughly before attempting to operate this device. These instructions contain important safety and use information.

UNPACKING

Carefully check the shipping carton for damage that may have occurred during shipping. If the carton is damaged, carefully inspect the device for damage, and be sure all accessories necessary to install and operate the device have arrived intact. In the event that damage has been found or parts are missing, please contact our customer support team for further instructions. Please do not return this device to your dealer without first contacting customer support. Please do not discard the shipping carton in the trash. Please recycle whenever possible.

BOX CONTENTS

Cross Bar Left (x1)
Cross Bar Right (x1)
Upper Tube (x2)
Lower Tube (x2)
Tube Clamp Left (x4)
Tube Clamp Right (x4)
Tube Clamp Thumbscrews (x4)
Small Thumbscrews (x4)
Carrying Bag

CUSTOMER SUPPORT

Contact ADJ Service for any product related service and support needs. Also visit forums.adj.com with questions, comments or suggestions.

ADJ SERVICE USA - Monday - Friday 8:00am to 4:30pm PST 323-582-2650 | Fax: 323-832-2941 | support@adi.com

ADJ SERVICE EUROPE - Monday - Friday 08:30 to 17:00 CET +31 45 546 85 60 | Fax: +31 45 546 85 96 | support@adi.eu

REPLACEMENT PARTS please visit parts.adj.com

IMPORTANT NOTICE!

THIS UNIT CONTAINS NO USER SERVICEABLE COMPONENTS. DO NOT ATTEMPT ANY REPAIRS YOURSELF, AS DOING SO WILL VOID YOUR MANUFACTURER'S WARRANTY. DAMAGES RESULTING FROM MODIFICATIONS TO THIS DEVICE AND/OR THE DISREGARD OF SAFETY INSTRUCTIONS AND GUIDELINES IN THIS MANUAL VOID THE MANUFACTURER'S WARRANTY AND ARE NOT SUBJECT TO WARRANTY CLAIMS AND/OR REPAIRS.

LIMITED WARRANTY (USA ONLY)

- A. ADJ Products, LLC hereby warrants, to the original purchaser, ADJ Products, LLC products to be free of manufacturing defects in material and workmanship for a prescribed period from the date of purchase (see specific warranty period on reverse). This warranty shall be valid only if the product is purchased within the United States of America, including possessions and territories. It is the owner's responsibility to establish the date and place of purchase by acceptable evidence, at the time service is sought.
- B. For warranty service, you must obtain a Return Authorization number (RA#) before sending back the product-please contact ADJ Products, LLC Service Department at 800-322-6337. Send the product only to the ADJ Products, LLC factory. All shipping charges must be pre-paid. If the requested repairs or service (including parts replacement) are within the terms of this warranty, ADJ Products, LLC will pay return shipping charges only to a designated point within the United States. If the entire instrument is sent, it must be shipped in its original package. No accessories should be shipped with the product. If any accessories are shipped with the product, ADJ Products, LLC shall have no liability whatsoever for loss of or damage to any such accessories, or for the safe return thereof.
- C. This warranty is void of the serial number has been altered or removed; if the product is modified in any manner which ADJ Products, LLC concludes, after inspection, affects the reliability of the product, if the product has been repaired or service by anyone other than ADJ Products, LLC factory unless prior written authorization was issued to purchaser by ADJ Products, LLC; if the product is damaged because not properly maintained as set forth in the instruction manual.
- D. This is not a service contact, and this warranty does not include maintenance, cleaning or periodic check up. During the period specified above, ADJ Products, LLC will replace defective parts at its expense with new or refurbished parts, and will absorb all expenses for warrant service and repair labor by reason of defects in material or workmanship. The sole responsibility of ADJ Products, LLC under this warranty shall be limited to the repair of the product, or replacement thereof, including parts, at the sole discretion of ADJ Products, LLC. All products covered by this warranty were manufactured after August 15, 2012, and bear identifying marks to that effect.
- E. ADJ Products, LLC reserves the right to make changes in design and/or improvements upon its products without any obligation to include these changes in any products theretofore manufactured.
- F. No warranty, whether expressed or implied, is given or made with respect to any accessory supplied with products described above. Except to the extent prohibited by applicable law, all implied warranties made by ADJ Products, LLC in connection with this product, including warranties of merchantability or fitness, are limited in duration to the warranty period set forth above. And no warranties, whether expressed or implied, including warranties of merchantability or fitness, shall apply to this product after said period has expired. The consumer's and/or Dealer's sole remedy shall be such repair or replacement as is expressly provided above; and under no circumstances shall ADJ Products, LLC be liable for any loss or damage, direct or consequential, arising out of the use of, or inability to use, this product.
- G. This warranty is the only written warranty applicable to ADJ Products, LLC Products and supersedes all prior warranties and written descriptions of warranty terms and conditions heretofore published.

LIMITED WARRANTY PERIODS

- Non L.E.D. Lighting Products = 1-year (365 days) Limited Warranty (Such as: Special Effect Lighting, Intelligent Lighting, UV lighting, Strobes, Fog Machines, Bubble Machines, Mirror Balls, Par Cans, Trussing, Lighting Stands etc. excluding LED and lamps)
- Laser Products = 1 Year (365 Days) Limited Warranty (excludes laser diodes which have 6 month limited warranty)
- L.E.D. Products = 2-year (730 days) Limited Warranty (excluding batteries which have a 180 day limited warranty)

 Note: 2 Year Warranty only applies to purchases within the United States.
- StarTec Series = 1 Year Limited Warranty (excluding batteries which have a 180 day limited warranty)
- ADJ DMX Controllers = 2 Year (730 Days) Limited Warranty

WARRANTY REGISTRATION

Please complete and mail in the enclosed warranty card to validate your purchase. All returned service items, whether under warranty or not, must be freight pre-paid and accompanied by a return authorization (R.A.) number. The R.A. number must be clearly written on the outside of the return package. A brief description of the problem as well as the R.A. number must also be written down on a piece of paper and included in the shipping container. If the unit is under warranty, you must provide a copy of your proof of purchase invoice. Items returned without an R.A. number clearly marked on the outside of the package will be refused and returned at customer's expense. You may obtain an R.A. number by contacting customer support.


SAFETY GUIDELINES

For proper operation, follow the installation guidelines described in this document. Only qualified and certified personnel should perform installation of this product. Any modifications to any part or parts of this product will void the original manufacturer's warranty and increase the risk of damage and/or personal injury. To guarantee a smooth operation, it is important to follow the guidelines in this document. The manufacturer of this product will not accept responsibility for damages resulting from the misuse and/or disregard of the information printed in this document.




NEVER look directly into the light source! Retina injury risk - MAY INDUCE BLINDNESS! Sensitive persons may suffer an epileptic shock!

- DO NOT attempt installation and/or operation without knowledge of how to do so.
- DO NOT allow installation by unqualified persons.
- DO NOT position product close to any flammable materials.
- AVOID use of brute force during installation.
- DO NOT modify any part of the product, including any included hardware accessories.
- DO NOT disassemble product while lighting fixtures are still attached.
- ALWAYS remove all lighting fixtures from product prior to disassembly.
- DO NOT attach any lighting fixtures to the cross bars until all four (4) included tube clamps are securely fastened to the device.
- DO NOT use this device if ANY of the four (4) tube clamps are damaged or missing. ALL FOUR (4) TUBE CLAMPS ARE NEEDED FOR SECURE ASSEMBLY!
- DO NOT load a combined weight of more than 80 lbs (36 kgs) onto the cross bars.
- All lighting fixtures must be attached to the cross bars with a safety cable!
- Make sure to load balance the fixtures attached to the cross bars!
- Space the lighting fixtures evenly on the cross bars from left to right.
- DO NOT attach a single heavily weighted fixture on one side of the cross bars without attaching an equally heavy counter weight to the other side of the cross bars! For example, do not attach a heavy moving head on one side of the cross bars and a lighter par fixture on the other!
- DO NOT attach lighting fixtures to the point where the cross bars connect together (see below)
- DO NOT attach moving head fixtures to the top cross bars. All moving head fixtures must be attached so that they hang inverted from the bottom cross bars.
- DO NOT position light output beam in the direct line of sight of the DJ.

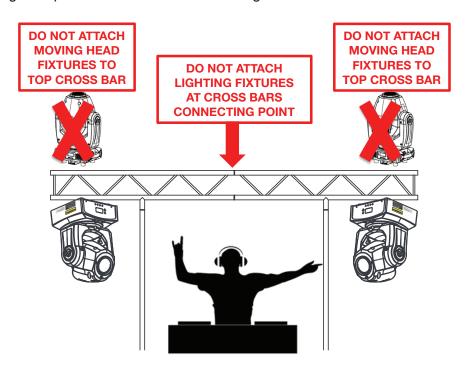


OVERVIEW

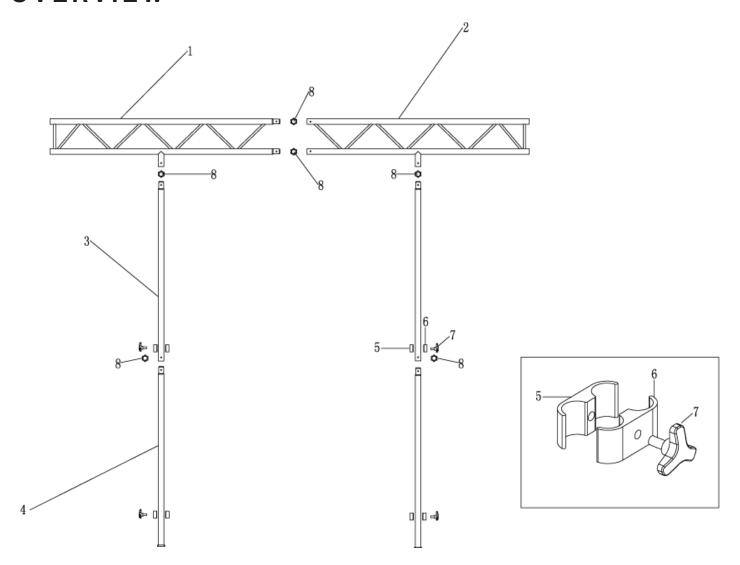

- 1. Cross Bar Left (x1)
- 2. Cross Bar Right (x1)
- 3. Upper Tube (x2)
- 4. Lower Tube (x2)
- 5. Tube Clamp Left (x4)
- 6. Tube Clamp Right (x4)
- 7. Tube Clamp Thumbscrews (x4)
- 8. Small Thumbscrews (x6)

INSTALLATION


- 1. Make sure the PRO EVENT TABLE/PRO EVENT TABLE II is completely and securely installed as per the included instructions and make sure it is installed on a flat surface.
- 2. Place all hardware pieces on the ground, and verifiy that all required parts and components are present.
- 3. Connect LEFT and RIGHT CROSS BARS together, securing with two (2) Small Thumbscrews.
- 4. Connect both pairs of UPPER and LOWER TUBES together, securing with two (2) Small Thumbscrews.
- 5. Connect both pairs of UPPER/LOWER TUBE sections to the LEFT/RIGHT CROSS BARS, securing with two (2) Thumbscrews. Orient the tube support feet away from the PRO EVENT TABLE.
- 6. Raise IBEAM up and position against backside of the PRO EVENT TABLE.
- 7. Connect IBEAM to PRO EVENT TABLE by securing with four (4) Tube Clamp sets. Connect one (1) Clamp to the upper section and one (1) Clamp to the lower section on each side of the PRO EVENT TABLE. (See image below) ONLY USE INCLUDED HARDWARE TO CONNECT PRO EVENT IBEAM TO PRO EVENT TABLE.
- 8. Confirm all four (4) Tube Clamps are securely attached to the PRO EVENT TABLE and both PRO EVENT IBEAM SUPPORT FEET are flat and touching the floor before attaching any lighting fixtures.
- 9. Carefully attach lighting fixtures to CROSS BARS, making sure to follow the guidelines listed in the **Safety Guidelines** section of this manual.

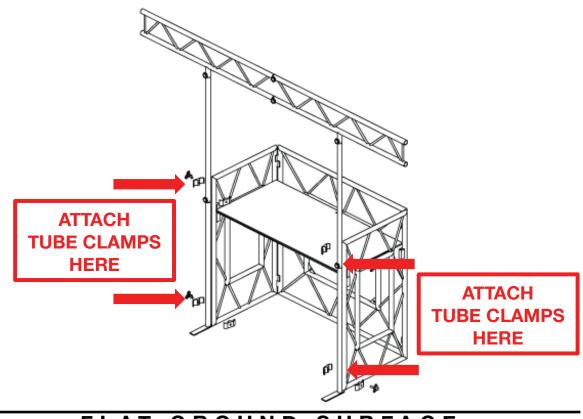

FLAT GROUND SURFACE

INSTALLATION


Completed:

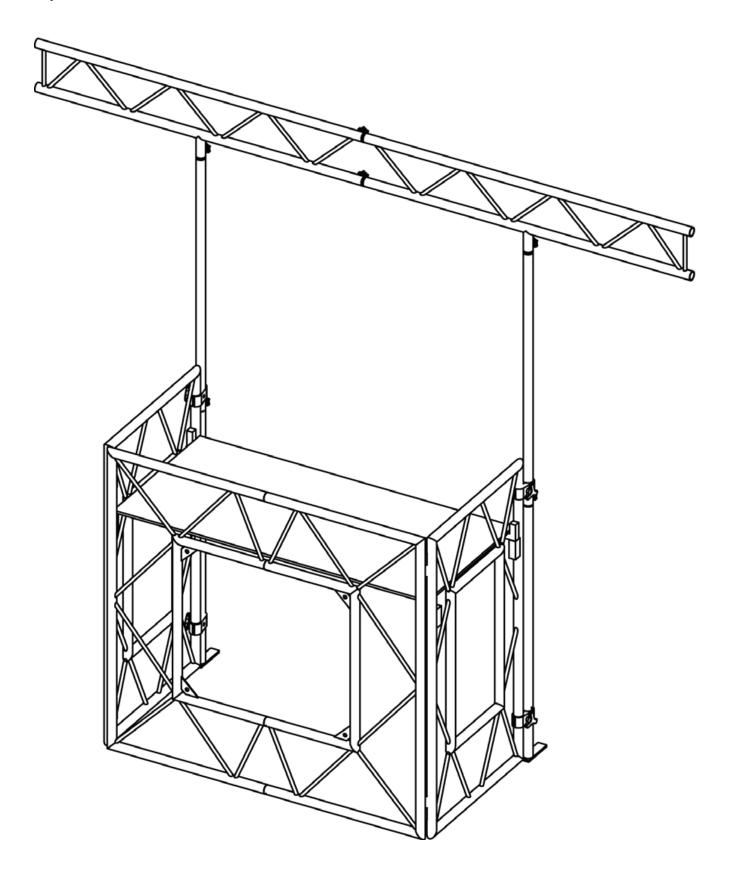

SPECIFICATIONS

- Aluminum I-Beam truss for the Pro Event Table, Pro Event Table II and Pro Event Table MB to hang lighting fixtures such as light weight par cans, wash fixtures, effect lights or small moving heads
- Includes hardware for mounting to the table
- Includes carry bag
- Use Junior Clamp to hang lighting (clamps sold separately) http://www.adj.com/jr-clamp
- Height: 87 inches (2.2M)
- Maximum load: 80 lbs. / 36 kg. (lighting fixtures should be evenly distributed)
- Pipe thickness: 1.25-inches
- Collapsed size (LxWxH): 52"x11.5"x4.25" / 1320x290x110 mm
- Weight: 16 lbs. / 7 kg.

DIMENSIONAL DRAWINGS

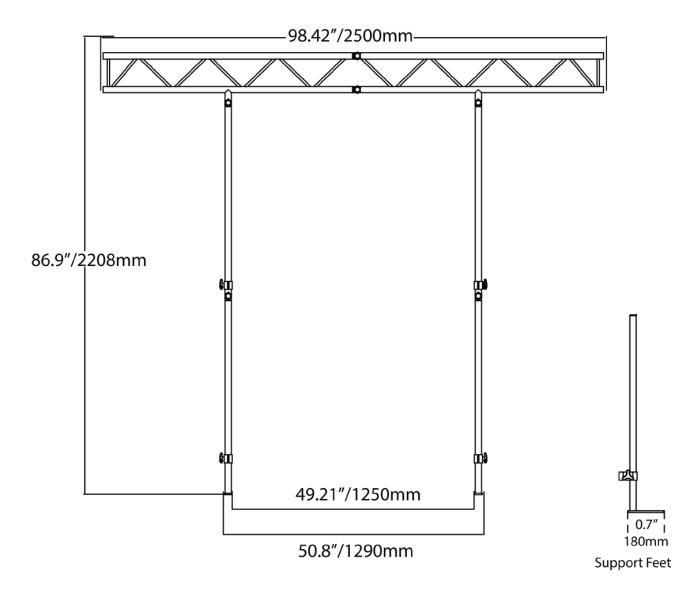

OPTIONAL ACCESSORIES

ORDER CODE	ITEM
PRO718	Pro Event Table
PRO100	Pro Event Table II
JR-CLAMP	Medium Duty Clamp for 35mm Tubing