



## PLATINUM WASH ZFX PRO XL™

SKU# EPW868

The Platinum Wash ZFX PRO XL™ features (37) 15W OSRAM HO RGBW LEDs producing comparable output of a 1200W wash fixture, motorized zoom (15° - 28°), variable color temperature (2700K - 8000K), multiple zone and individual pixel control, built-in EWDMX receiver, electronic strobe (1-13 fps) and dimming (0-100%), flicker free operation for TV and FILM, 3 and 5pin in/out DMX and power in connections, (6) button touch control panel, 700W max power consumption, and a multi-voltage universal auto switching power supply (120-240v).

### FEATURES

- Comparable Output of 1200W Wash Fixture
- (37) 15W Osram™ HO QUAD Color RGBW LEDs
- Motorized Zoom (15° - 28°)
- Variable Color Temperature (2700K - 8000K)
- Multiple Zone and Individual Pixel Control
- Internal EWDMX Wireless DMX Receiver
- Electronic Strobe (1-13 fps) and Dimming (0-100%)
- Flicker Free Operation for TV and FILM



ELATION | PLATINUM WASH ZFX PRO XL™ | Product Specification Sheet

Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands  
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

**PRODUCT SPECIFICATIONS**

**FEATURES**

Comparable Output of 1200W Wash Fixture  
 Quad Color RGBW Mixing  
 Motorized 15° - 43° Zoom  
 Variable Color Temperature (2700K - 8000K)  
 Multiple Zone and Individual Pixel Control  
 EWDMMX Internal Wireless DMX Receiver  
 Flicker Free Operation for TV and FILM

**SOURCE**

(37) 15W OSRAM HO RGBW LEDs  
 100,000 Hour Average Life

**PHOTOMETRIC DATA**

8,160 LUX 758 FC @4M 15° Beam Full ON  
 3,157 LUX 293 FC @4M 15° Beam WHITE LEDs Full ON  
 5,260 LUX 489 FC @4M 28° Beam Full ON  
 1,620 LUX 150 FC @4M 28° Beam WHITE LEDs Full ON

**EFFECTS**

Variable Strobe Settings (1-13 fps)  
 Electronic Dimming (0% - 100%)  
 Chase Zone and Individual Pixel Macros

**COLOR**

Quad Color RGBW

**CONTROL / CONNECTIONS**

(3) DMX Channel Modes (19 / 30 / 160)  
 Pan Movement: 630° / Tilt Movement: 265°  
 6 Button Control Panel  
 Full Color 180° Reversible LCD Menu Display  
 8 / 16 Bit Resolution Adjustable Movement  
 3pin & 5pin DMX In/Out  
 power In

**SIZE / WEIGHT**

Length: 19.4" (493mm)  
 Width: 13.2" (335mm)  
 Vertical Height: 23.4" (594mm)  
 Weight: 54.0 lbs. (24.5kg)

**ELECTRICAL / THERMAL**

AC 100-240V - 50/60Hz  
 660W Max Power Consumption  
 113°F (45°C) Max Ambient Temp

**APPROVALS / RATINGS**

CE Approved  
 cETLus Approved  
 IP20 Rated

**INSTALLATION**


Rigging: Omega Brackets  
 Working Position: Flat Surface / Inverted (180°)

**INCLUDED ITEMS**

(2) Omega Brackets  
 (1) 3pin XLR Cable




**PHOTOMETRIC DATA**

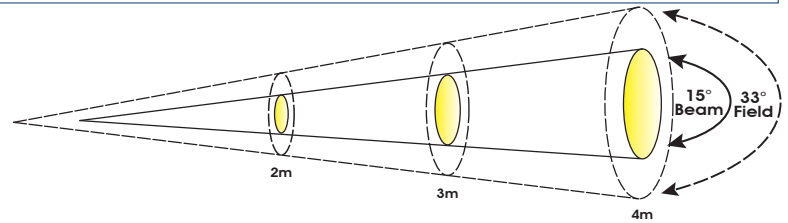

**MIN ZOOM**

Distance	m	ft	m	ft	m	ft
	2	6.6	3	9.8	4	13.1
15° Beam Diameter	0.54	1.8	0.81	2.7	1.08	3.5
33° Field Diameter	1.2	3.9	1.8	5.9	2.4	7.9

Photometrics	lux	fc	lux	fc	lux	fc
RED LEDs	4,144	385	1,540	143	1,320	123
GREEN LEDs	9,681	899	4,135	384	2,344	218
BLUE LEDs	4,770	443	2,010	187	650	60
WHITE LEDs	13,170	1,223	4,481	416	3,157	293
FULL ON	22,020	2,046	11,030	1,025	8,160	758

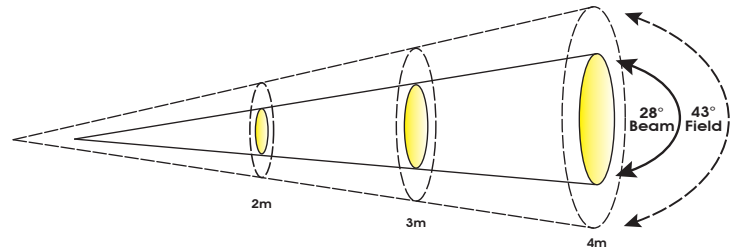


**MAX ZOOM**

Distance	m	ft	m	ft	m	ft
	2	6.6	3	9.8	4	13.1
28° Beam Diameter	1	3.3	1.5	4.9	2	6.6
43° Field Diameter	1.6	5.2	2.4	7.9	3.2	10.5

Photometrics	lux	fc	lux	fc	lux	fc
RED LEDs	1,781	165	680	63	410	38
GREEN LEDs	3,856	358	1,645	153	1,352	126
BLUE LEDs	4,360	405	790	73	190	18
WHITE LEDs	4,835	449	2,100	195	1,620	150
FULL ON	11,900	1,106	7,580	704	5,260	489

**DIMENSIONAL DIAGRAM**

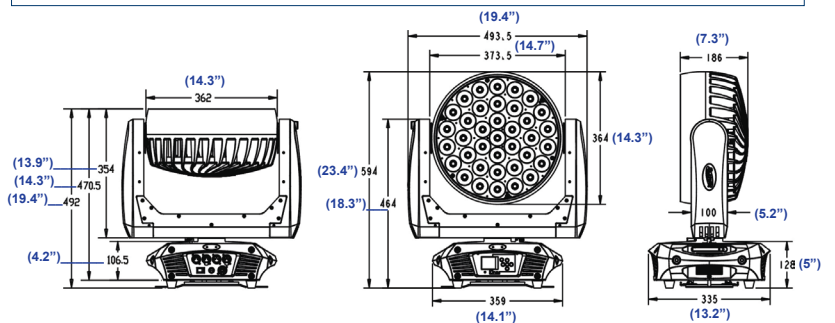

**OPTIONAL ACCESSORIES**

ORDER CODE	ITEM
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
DRC ZFX XL	Dual Road Case For Platinum Wash ZFX PRO XL™
ELO211	Eloader II™ Software Updater Box
EWDMMXSYSTEM	Wireless DMX System (1 Transmitter, 1 Receiver)
EWDMMXT	Wireless DMX Transmitter
EWDMMXR	Wireless DMX Receiver
AC3PDMX5PRO	5 ft. (1.5m) 3pin PRO DMX Cable
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable
	Additional cable lengths available